

# **HYUPSHIN FLANGES**



# **Flanges**

# **Flansche**


# **Brides**

Vorschweißflansche

DIN 2631



Werkstoff:  
1.4541 / 1.4571

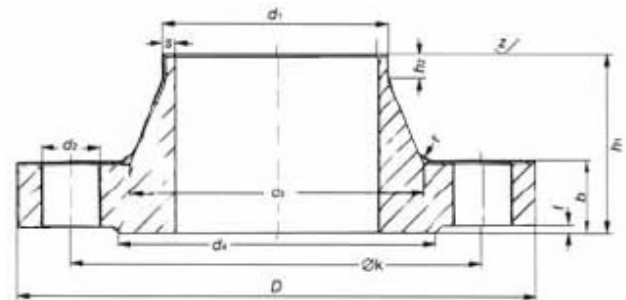

DIN 2631 PN 6

Rohranschlussmaße			Flansch				Ansatz				Dichtleiste /		Schrauben		Gewicht in kg <sup>±</sup>	
DN	Reihe 1	Reihe 2	D	b	k	h <sub>1</sub>	d <sub>3</sub>	s	r	h <sub>2</sub>	d <sub>4</sub>	f	Anzahl	Gewinde		d <sub>2</sub>
10	-	14,0	75	12	50	28	22	1,8	4	6	35	2	4	M 10	11	0,335
10	17,2	-	75	12	50	28	26	1,8	4	6	35	2	4	M 10	11	0,335
15	-	20,0	80	12	55	30	28	2,0	4	6	40	2	4	M 10	11	0,392
15	21,3	-	80	12	55	30	30	2,0	4	6	40	2	4	M 10	11	0,392
20	-	25,0	90	14	65	32	35	2,3	4	6	50	2	4	M 10	11	0,592
20	26,9	-	90	14	65	32	38	2,3	4	6	50	2	4	M 10	11	0,592
25	-	30,0	100	14	75	35	40	2,6	4	6	60	2	4	M 10	11	0,747
25	33,7	-	100	14	75	35	42	2,6	4	6	60	2	4	M 10	11	0,747
32	-	38,0	120	14	90	35	50	2,6	6	6	70	2	4	M 12	14	1,050
32	42,4	-	120	14	90	35	55	2,6	6	6	70	2	4	M 12	14	1,050
40	-	44,5	130	14	100	38	58	2,6	6	7	80	3	4	M 12	14	1,180
40	48,3	-	130	14	100	38	62	2,6	6	7	80	3	4	M 12	14	1,180
50	-	57,0	140	14	110	38	70	2,9	6	8	90	3	4	M 12	14	1,340
50	60,3	-	140	14	110	38	74	2,9	6	8	90	3	4	M 12	14	1,340
65	76,1	-	160	14	130	38	88	2,9	6	9	110	3	4	M 12	14	1,670
80	88,9	-	190	16	150	42	102	3,2	8	10	128	3	4	M 16	18	2,710
100	-	108,0	210	16	170	45	122	3,6	8	10	148	3	4	M 16	18	3,240
100	114,3	-	210	16	170	45	130	3,6	8	10	148	3	4	M 16	18	3,240
125	-	133,0	240	18	200	48	148	4,0	8	10	178	3	8	M 16	18	4,490
125	139,7	-	240	18	200	48	155	4,0	8	10	178	3	8	M 16	18	4,490
150	-	159,0	265	18	225	48	172	4,5	10	12	202	3	8	M 16	18	5,150
150	168,3	-	265	18	225	48	184	4,5	10	12	202	3	8	M 16	18	5,150
200	219,1	-	320	20	280	55	236	5,9	10	15	258	3	8	M 16	18	7,780
250	-	267,0	375	22	335	60	282	6,3	12	15	312	3	12	M 16	18	10,800
250	273,0	-	375	22	335	60	290	6,3	12	15	312	3	12	M 16	18	10,800
300	323,9	-	440	22	395	62	342	7,1	12	15	365	4	12	M 20	22	14,000
350	355,6	-	490	22	445	62	385	7,1	12	15	415	4	12	M 20	22	18,500
350	-	368,0	490	22	445	62	385	7,1	12	15	415	4	12	M 20	22	16,700
400	406,4	-	540	22	495	65	438	7,1	12	15	465	4	16	M 20	22	21,200
400	-	419,0	540	22	495	65	438	7,1	12	15	465	4	16	M 20	22	19,000
500	508,0	-	645	24	600	68	538	7,1	12	15	570	4	20	M 20	22	28,600
600	610,0	-	755	24	705	70	640	7,1	12	16	670	5	20	M 24	26	31,500
700	711,0	-	860	24	810	70	740	7,1	12	16	775	5	24	M 24	26	37,400
800	813,0	-	975	24	920	70	842	7,1	12	16	880	5	24	M 27	30	46,100
900	914,0	-	1075	26	1020	70	942	7,1	12	16	980	5	24	M 27	30	55,600
1000	1016,0	-	1175	26	1120	70	1045	7,1	16	16	1080	5	28	M 27	30	61,900

Maß- und Modelländerungen vorbehalten.  
Alle Maße in mm

**We Supply following steel flanges in norms:**

**In DIN-Standard:**

Blind Flanges: DIN 2527 PN 6 / PN 10 / PN 16 / PN 25 / PN 40 / PN 64 / PN 100

Welding Flanges: DIN 2573 PN 6 / DIN 2576 PN 10 / DIN 2501 / DIN 2502 / DIN 2503 / DIN 2543 PN16

Welding Neck Flanges: DIN 2631 PN 6 / DIN 2632 PN 10 / DIN 2633 PN 16 / DIN 2634 PN 25 / DIN 2635 PN 40

Lapped Flanges: DIN 2641 PN 6 / DIN 2642 PN 10

Threaded Flanges: DIN 2565 PN 6 / DIN 2566 PN 16

**In UNI-Standard:**

Blind Flanges: UNI 6091 PN 6 / UNI 6092 PN 10 / UNI 6093 PN 16 / UNI 6094 PN 25 / UNI 6095 PN 40

Welding Flanges: UNI 2276 PN 6 / UNI 2277 PN 10 / UNI 2278 PN 16 / UNI 6083 / UNI 6084

Welding Neck Flanges: UNI 2280 PN 6 / UNI 2281 PN 10 / UNI 2282 PN 16 / UNI 2283 PN 25 / UNI 2284 PN 40

Lapped Flanges: UNI 6088 PN 6 / UNI 6089 PN 10/ UNI 6090 PN 16

Threaded Flanges: UNI 2253 PN 6 / UNI 2254 PN 16

**In EN 1092-1 Standard:**

Blind Flanges: Type 05 PN 6 / PN 10 / PN 16 / PN 25 / PN 40

Welding Flanges: Type 01 PN 6 / PN 10 / PN 16 / PN 25 / PN 40

Welding Neck Flanges: Type 11 PN 6 / PN 10 / PN 16 / PN 25 / PN 40

Lapped Flanges: Type 02 PN 6 / PN 10 / PN 16

Threaded Flanges: Type 13 PN 6 / PN 16

**Raw Material for Carbon Steel:**

European Norms: C22.8, RSt 37-2, S235JRG2, C21, P245GH, P250GH, P265GH

ASTM Norms: A105, A350

**We provide all flanges according to your specifications and drawings, we  
delivery flanges to all ports where you in anywhere.**

**JINAN HYUPSHIN FLANGES CO., LTD**

No6, Nanbei Road, Niupai, Mingshui,  
Zhangqiu City, Shandong,  
China - 250 200

**President** : Mr. Guo Zhaoji

**Director** : Mr. Hong Songjo

Tel : + 86 531 832 945 52

Fax : + 86 531 832 918 78

**Marketing Director**: Mr. Austin. Guo

Tel : + 86 531 836 354 21

Fax : + 86 531 832 977 28

Email: austin@hyupshin.cn

Skype : iguorui

**For Marketing & Products enquiries:**

sale@hyupshin.cn

[www.forged-flange.com](http://www.forged-flange.com)

[www.hyupshin.cn](http://www.hyupshin.cn)